




Subscriber Wallbox ORO2X

Product Overview

The Hexatronic compact residential outlet for 2 fibres terminated with SC connectors. Hinged optical splice tray can house up to 4 splices in either mechanical splice form or heat shrink fusion. Designed for cost effective optical network installations, primarily FTTH and FTTD applications. A screw fixing allows the installer to prevent any accidental access to the splice area,

Features

- Cable entry from rear or bottom or top
- Suitable for inline extraction cable
- Flip tray for easy access
- Fibre management secures minimum bend radius

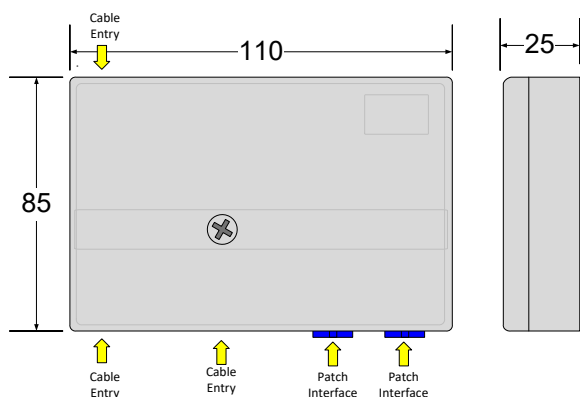

Specifications

Dimensions (mm)	110x85x25
Weight	75g
Ports	3 cable, 2 patch
Cable Diameter	10mm
Splice Capacity	4
Patch Capacity	4 (LC)

Ordering Information

Part number	Description
CFSDU-ORO2X-02-ALC	Subscriber Wallbox ORO2X White