




Distance (m) vs. Load (w) Chart

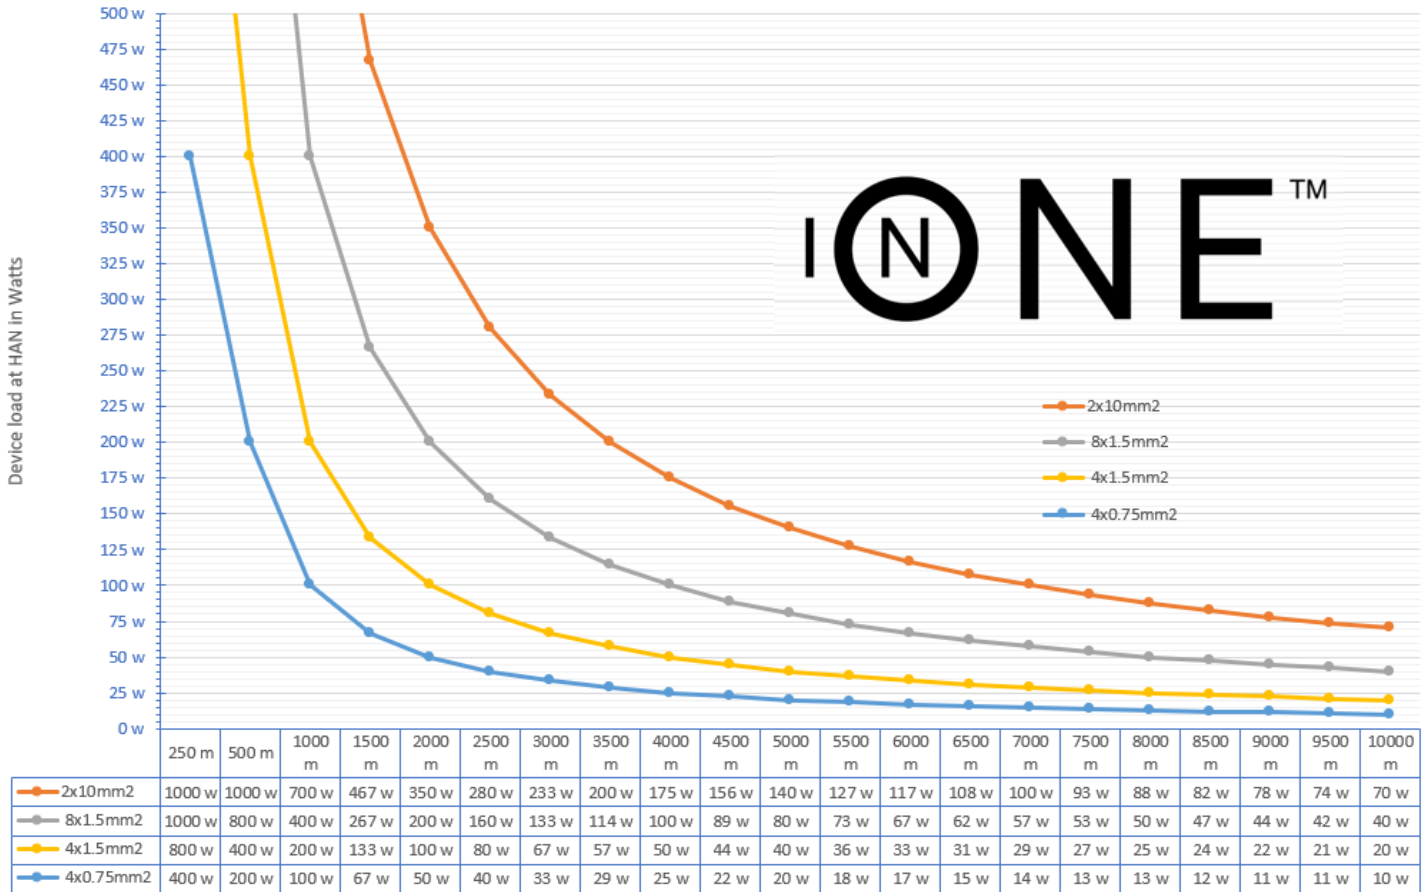

	Product No	Cable Type	Copper Area	Fiber Type	Fiber count	Cable Diameter	Drum	Weight
F1.5	TOL4079030/12	Fire Rated	4x0.75mm ²	G.657	12	7.9mm	K12 - 8000 m, K10 - 4000 m	95 kg/km
F3	TOL4079031/24	Fire Rated	4x1.5mm ²	G.657	24	10mm	K10 - 2000 m	145 kg/km
B1.5	TOL4079028/12	Blowable	4x0.75mm ²	G.657	24	5.7mm	K10 - 8000 m, K8 - 4000 m	45 kg/km
B3	TOL4079029/24	Blowable	4x1.5mm ²	G.657	24	6.2mm	K8 - 3000 m	80 kg/km
B6	TOL4079036/24	Blowable	8x1.5mm ²	G.657	24	9.8mm	K12 - 8000 m	170 kg/km
A6	TOL4079037/48C	Aerial	8x1.5mm ²	G.657	48	13.9mm	K11 - 3000 m	220 kg/km
N10	TOL4079038/24	Non-Blowable	2x10mm ²	G.657	48	12.6mm	K11 - 500 m	271 kg/km

hexatronic



InOne HAN lineup

Part Number	Encl.	Power	Vout1	Vout2	Combine outputs	Voltage Boost	Extra
HNCD520254/1	E2	100W	48VDC		NO	53VDC	
HNCD520252/1	E3	150W	48VDC		No	53VDC	
HNCD520252/3	E3	150W	48VDC		No	53VDC	MC Dual SFP, 2 Ports PoE bt, / 2 ext. RJ45 IP67
HNCD520271/1	E3	150W	48VDC 24VDC*		No	53VDC	*PoE bt to 24VAC / 80W
HNCD520242/1	E10	150W	48VDC		No	53VDC	
HNCD520242/1AA	E10	480W	48VDC	48VDC	YES	+10%	Aux Tray
HNCD520242/1AB	E10	480W	48VDC	24VDC	No	+10%	Aux Tray
HNCD520242/1BB	E10	480W	24VDC	24VDC	YES	+10%	Aux Tray
HNCD520242/70	E10s	150W	48VDC		No	53VDC	Assa lock & Sensor Holders, Aux Tray**
HNCD520242/70AA	E10s	480W	48VDC	48VDC	Yes	+10%	Assa lock & Sensor Holders, Aux Tray**
HNCD520242/70AB	E10s	480W	48VDC	24VDC	No	+10%	Assa lock & Sensor Holders, Aux Tray**
HNCD520242/70BB	E10s	480W	24VDC	24VDC	YES	+10%	Assa lock & Sensor Holders, Aux Tray**